



Sea Sprite+ ver6 audio MODs

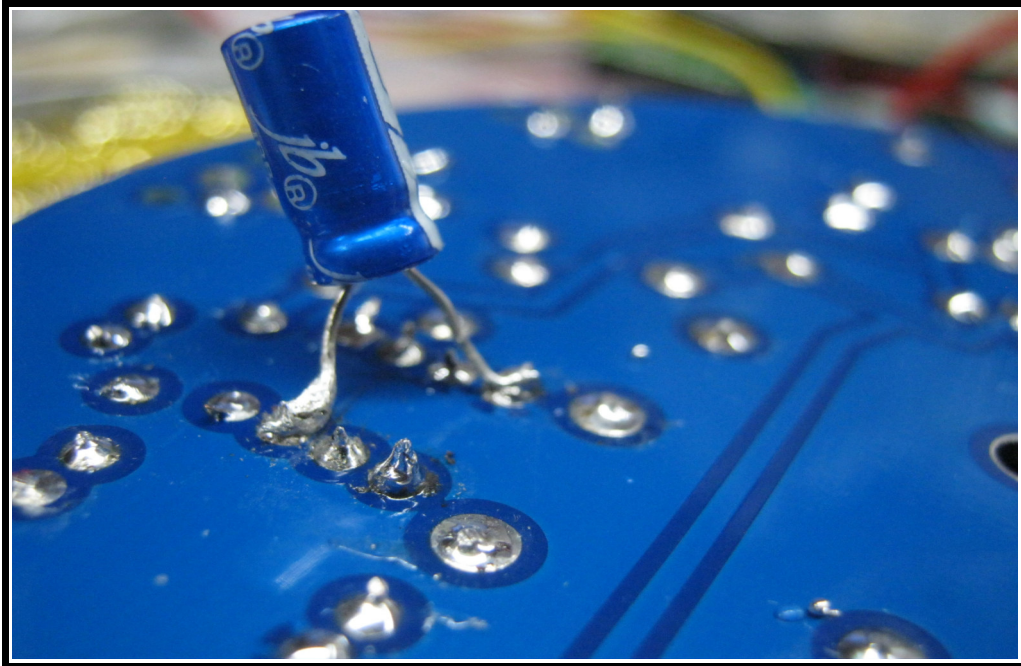

When viewed upside down pin1 on the 8pin device is upper right and has a square pad so solder 10uf + on pin7 and - to pin4

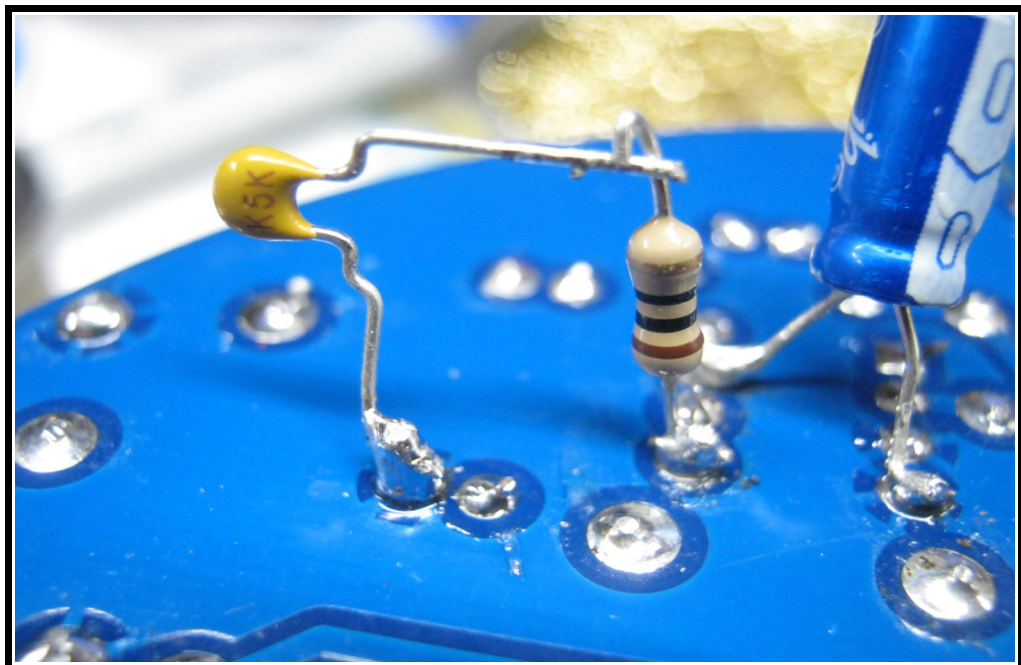

10 ohm resistor soldered on pin 5 and the .1uf cap attached to the left side of the 10uf cap ...where the grounding rays are.