


## Note 2007.2

Instead of constantly inserting and removing jumper wires each time you prototype a circuit, you could pick the 4 corners and feed +5 to the two 'top' corners and ground to the 2 'bottom' corners and leave them there, making it easier next time to wire something up.

### EXAMPLE:

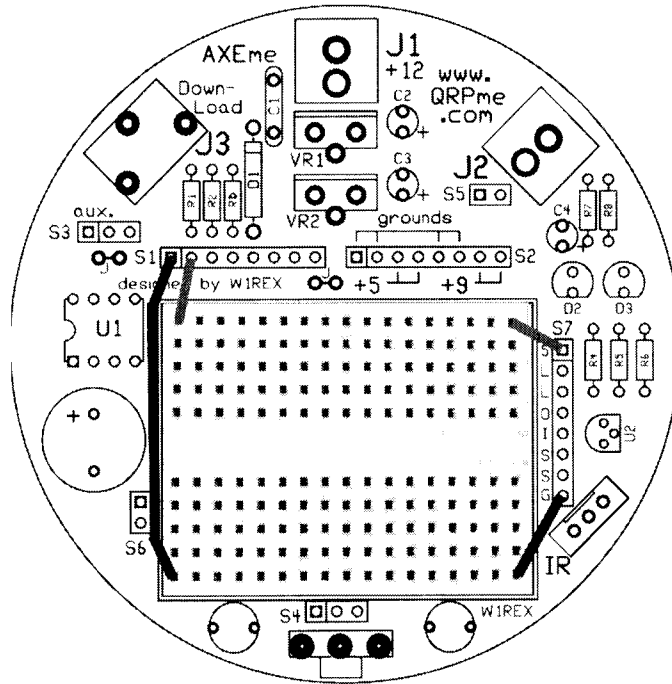

Or use the top left corner for +5V and the top right corner for +9V.

